

# Waste Management/Handling CDM Project


13 May 2011

Satoshi Sugimoto  
JICA Expert Team

## Contents

1. Waste Management and GHGs Emission
2. Wastewater Management and GHGs Emission
3. CDM Project Prototypes
4. Key Parameters in CH<sub>4</sub> Emission from Waste
5. Estimation of CH<sub>4</sub> Emission from Waste
6. Exercise: Estimation of CH<sub>4</sub> Emission from Solid Waste Disposal Site

# 1. Waste Management and GHGs Emission

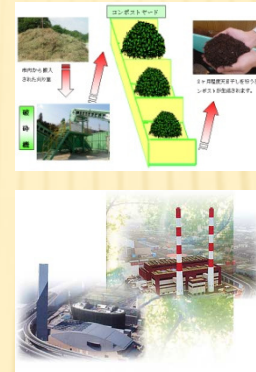

Waste Discharge  
at Sources

Collection and  
Transportation

Intermediate  
Treatment

Final Disposal at  
Landfills

CO<sub>2</sub>

{ Fuel combustion by  
collection vehicles }

CO<sub>2</sub>

{ In the case of incinerating  
waste with the use of fossil  
fuels }

CH<sub>4</sub>

{ Anaerobic decomposition  
of organic wastes }

## 2. Wastewater Management and GHGs Emission

$\text{CH}_4$   
(Anaerobic Decomposition of organic matter)



**Domestic Wastewater**



**Agricultural Wastewater**

### 3. CDM Project Prototypes


GHG emission source	Emission Reduction Methods	
Solid Waste/ Wastewater	CH <sub>4</sub> Capture	Flaring (Burning)
		Direct heat use
		Electricity generation
	CH <sub>4</sub> Emission Avoidance/Reduction by Aerobic Treatment of Organic Matter	

Including composting

**Applicable GHGs emission reduction methods are basically same for solid waste and wastewater treatment.**


# 3. CDM Project Prototypes

## (1) Methane capture from waste landfill

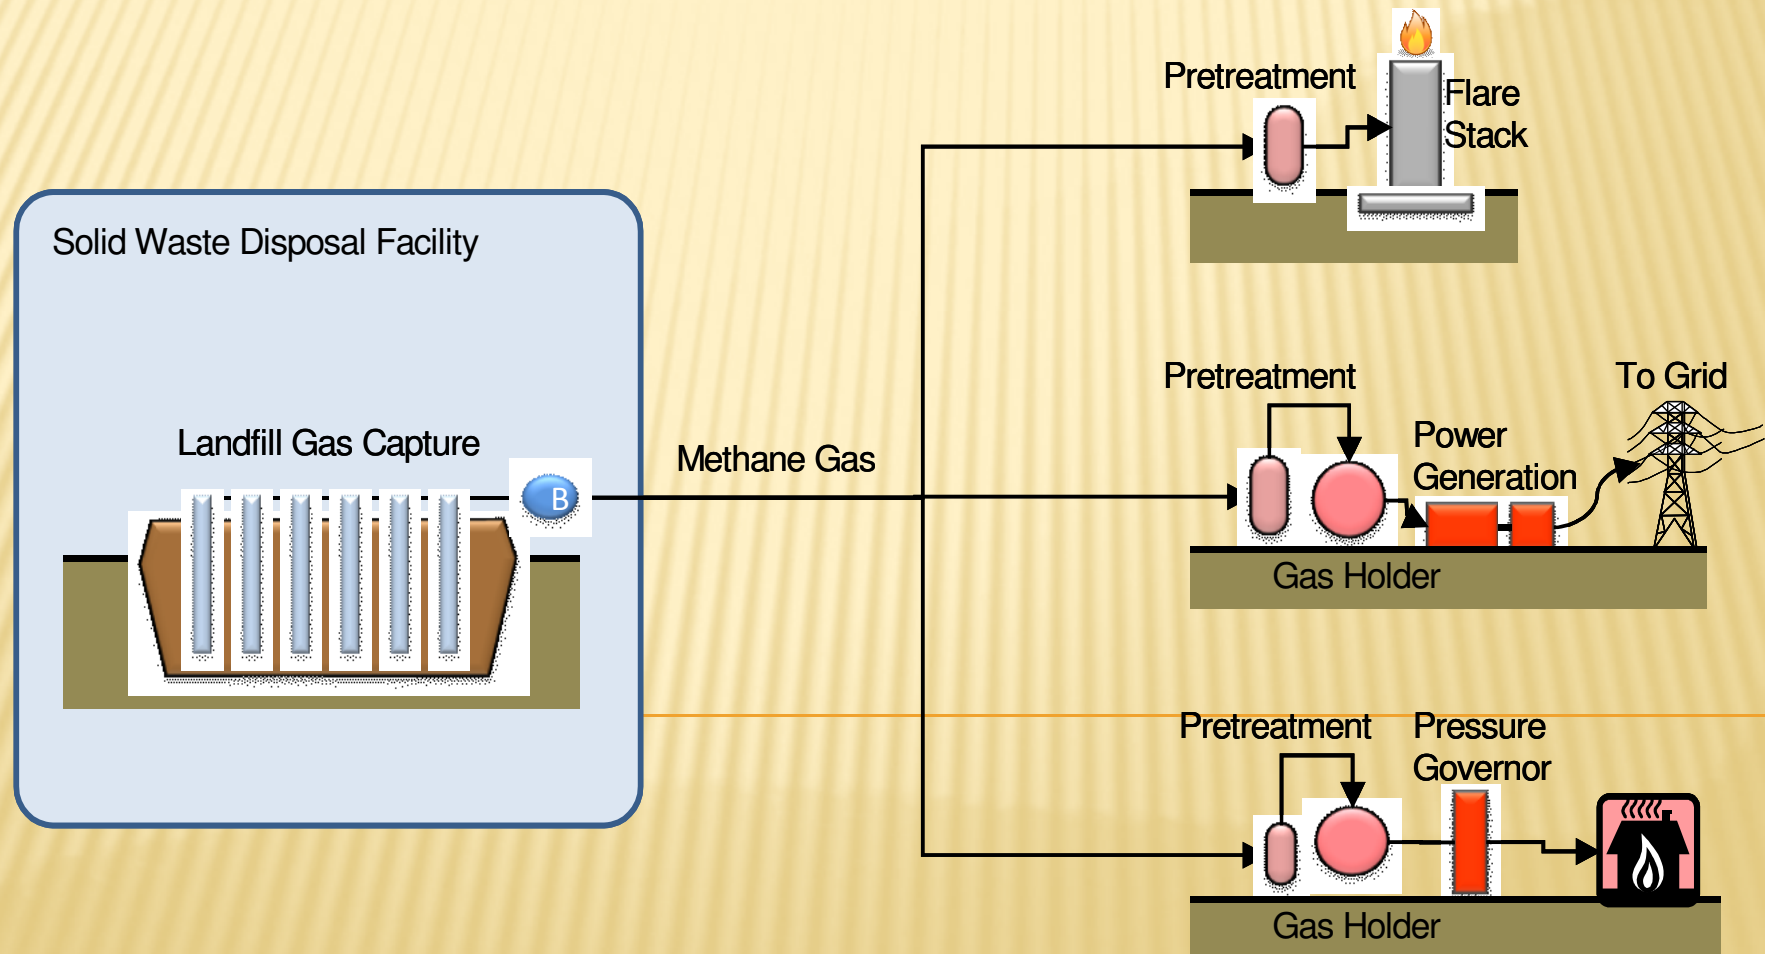


# 3. CDM Project Prototypes

## (2) Methane capture from anaerobic wastewater treatment (Type A)

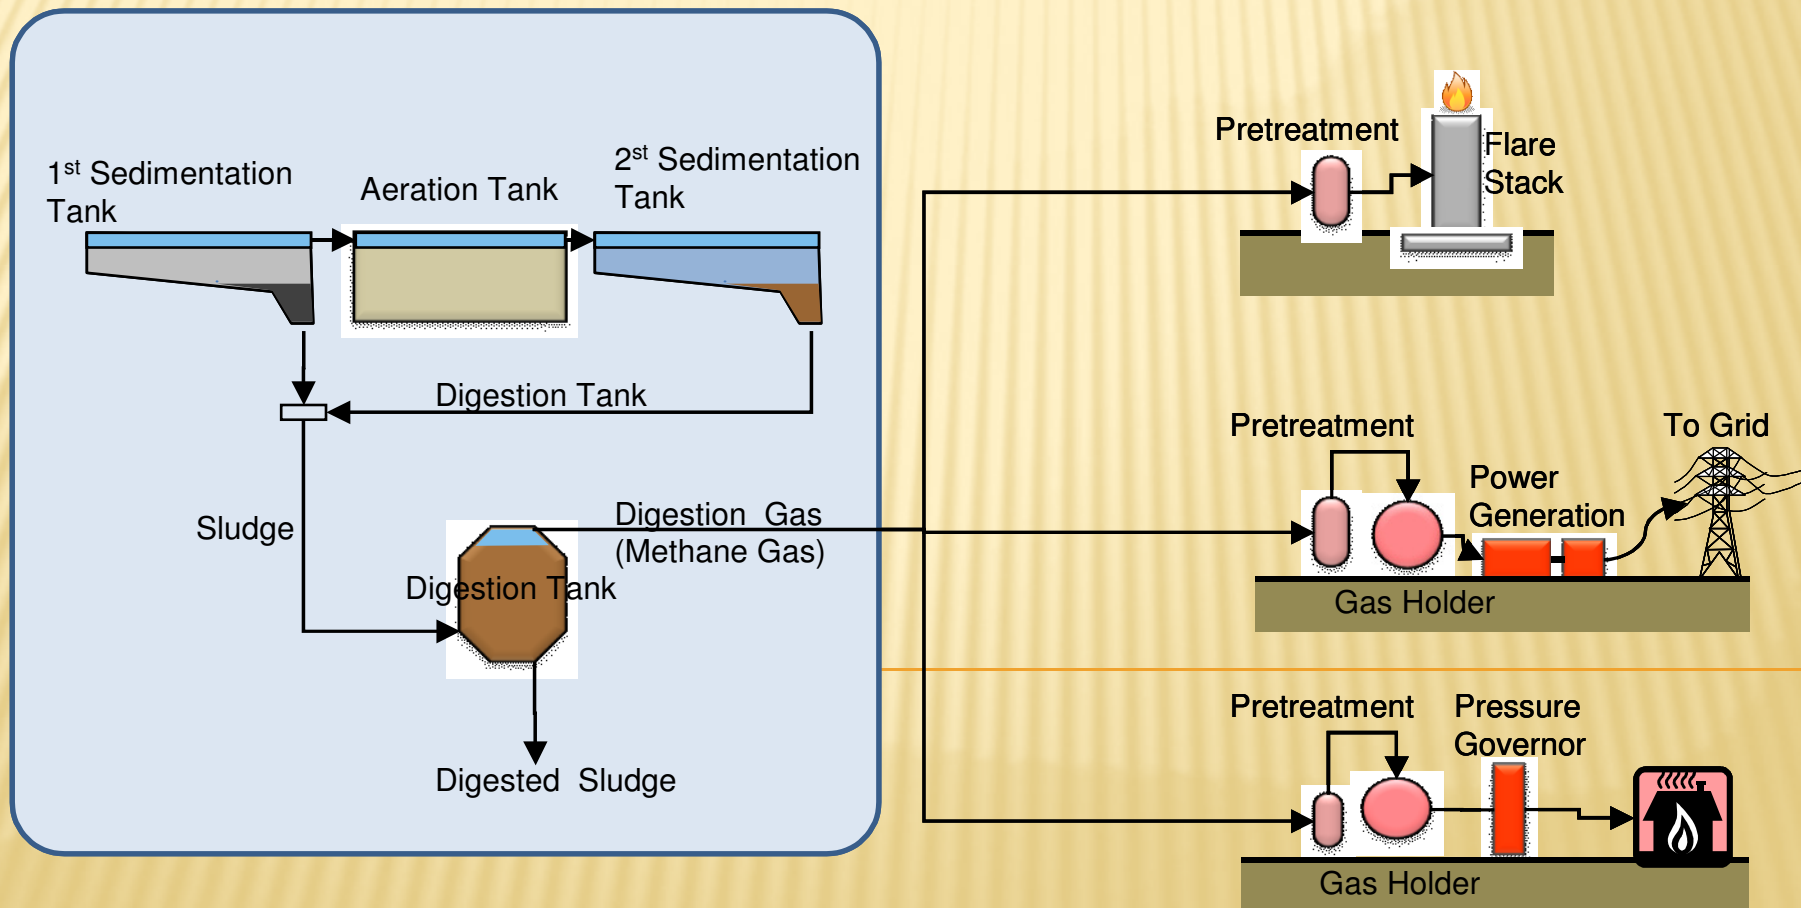

# 3. CDM Project Prototypes

## (3) Methane capture from anaerobic wastewater treatment (Type B)

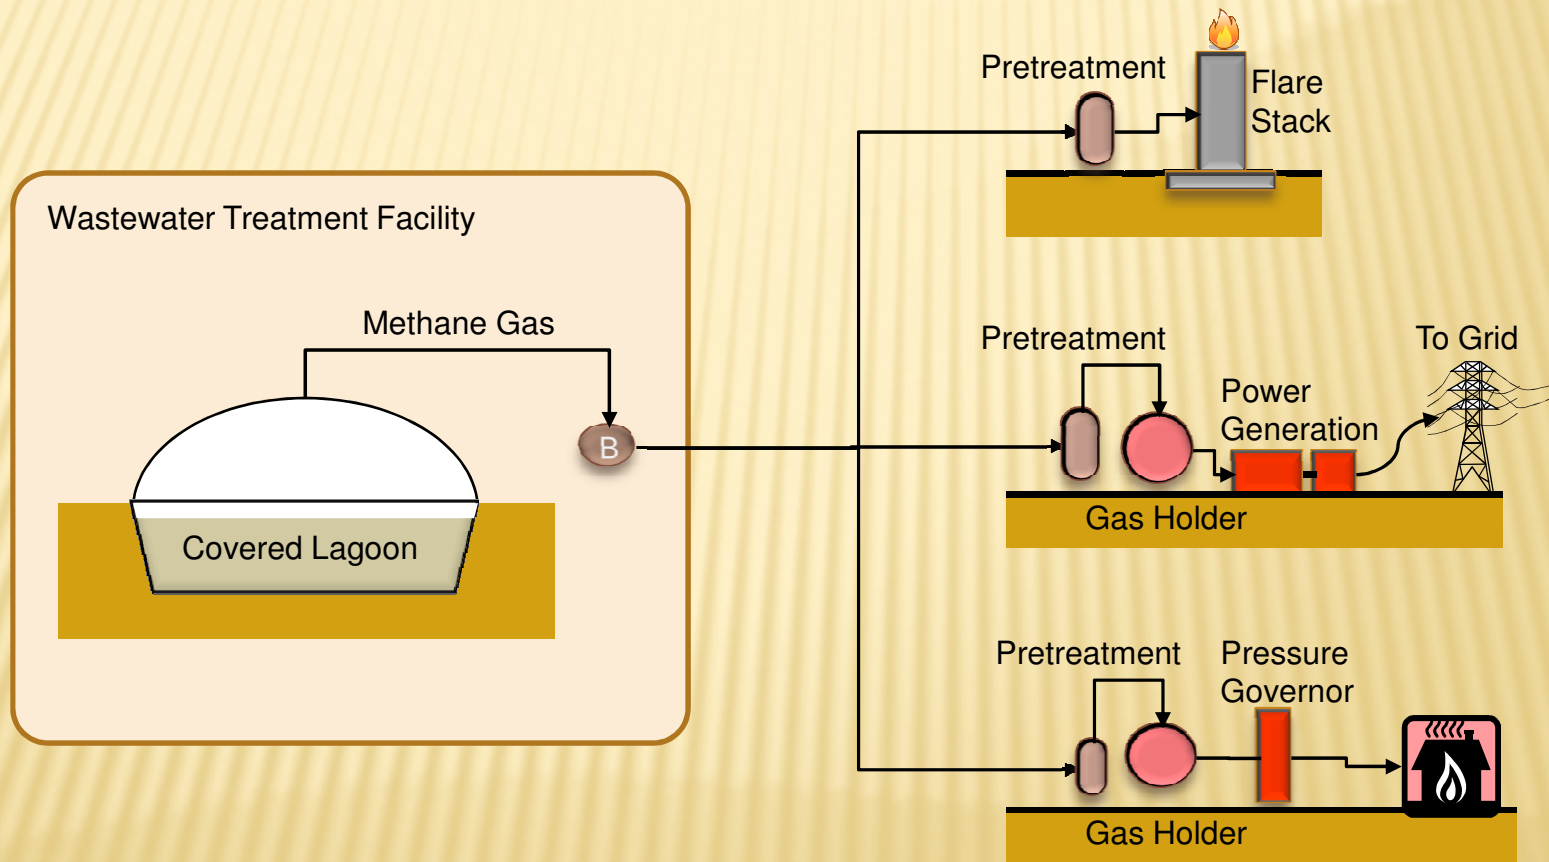





# 3. CDM Project Prototypes

## (4) Methane avoidance by composting of organic matter in solid waste

Current Practice (before CDM Project)

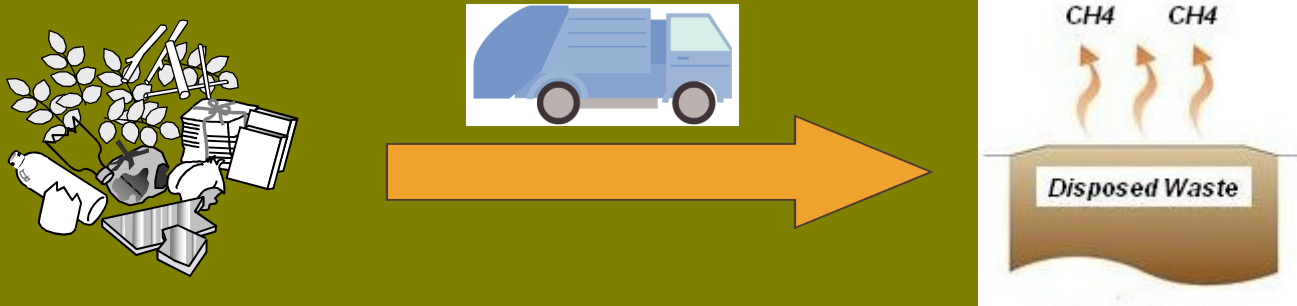

Project Scenario

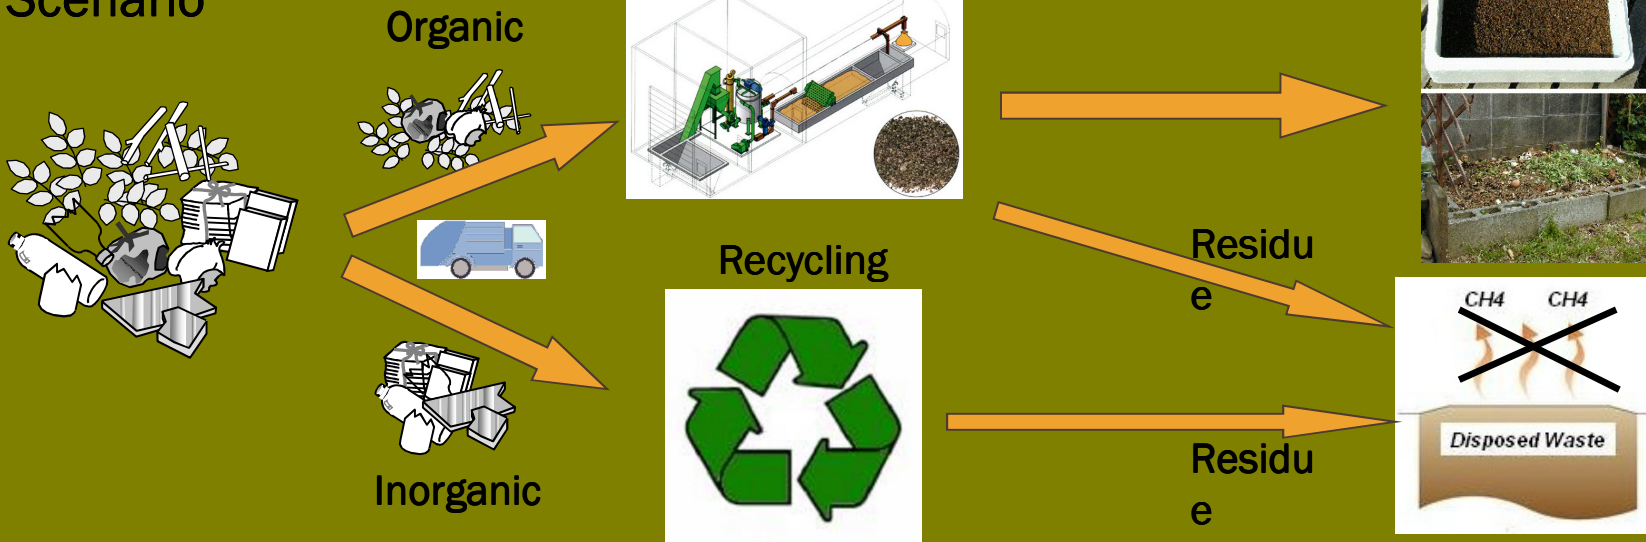

## 4. Key parameters in CH<sub>4</sub> emission from waste

### CH<sub>4</sub> emission from waste

- CH<sub>4</sub> is generated as a result of degradation of organic materials under anaerobic conditions.
- The time required for the waste to decay (half-life) is different among the types of waste.
- Part of CH<sub>4</sub> generated is oxidized in the cover of solid waste disposal (CH<sub>4</sub> oxidation by methanotrophic micro-organisms in cover soils).

### Key Parameter in CH<sub>4</sub> emission

- Degradable organic materials (Degradable Organic Carbon: DOC) in waste.
- Degree of anaerobic condition in waste (Methane Correction Factor: MCF).
- The time required for the waste to decay (decay rate)

## 4. Key parameters in CH<sub>4</sub> emission from waste

### (1) Content of DOC by types of waste

Type of Waste	DOC content (% on weight basis)	
	Wet waste	Dry waste
Paper/cardboard	40	44
Textiles	24	30
Food waste	15	38
Wood	43	50
Garden and park waste	20	49
Nappies	24	60
Rubber and leather	39	47
Inert waste (plastic, metal, glass)	-	-

Content of organic waste is the key to amount of CH<sub>4</sub> emission.

## 4. Key parameters in CH<sub>4</sub> emission from

waste

### (2) Degree of anaerobic condition (Methane Correction Factor)

Type of Waste disposal (Landfill)	Methane Correction Factor (MCF)
Managed – anaerobic	1.0
Managed – semi-aerobic	0.5
Unmanaged – deep (>5 m waste) and/or high water table	0.8
Unmanaged – Shallow (<5 m waste)	0.4
Uncategorised waste disposal	0.6

- The intensity of methane emission is considerably influenced by the anaerobic condition of waste varying with types of final disposal practices.
- The more anaerobic the condition of waste, the more CH<sub>4</sub> is generated.

## 4. Key parameters in CH<sub>4</sub> emission from

### (2) Degree of anaerobic condition (Methane Correction Factor)

Type of Waste disposal (Landfill)	Definition
Managed – anaerobic	The landfills which have controlled placement of waste (i.e. waste directed to specific deposition areas, a degree of control of scavenging and a degree of control of fires) and include at least one of the following: (i) cover material; (ii) mechanical compacting; or (iii) levelling of the waste.
Managed – semi-aerobic	The landfills which have controlled placement of waste and include all of the following structures for introducing air to waste layer: (i) permeable cover material; (ii) leachate drainage system; (iii) regulating pondage; and (iv) gas ventilation system.
Unmanaged – deep (>5 m waste) and/or high water table	All landfills not meeting the criteria of managed landfills above and which have depths of greater than or equal to 5 meters and/or high water table at near ground level.
Unmanaged – Shallow (<5 m waste)	All landfills not meeting the criteria of managed landfills above and which have depths of less than 5 meters.

## 4. Key parameters in CH<sub>4</sub> emission from waste

(3) Time required for the waste to decay (Decay rate of waste)

Type of Waste		Tropical Climate (MAT >20°C)	
		Dry (MAP < 1,000mm)	Moist and Wet (MAP ≥ 1,000mm)
Slowly degrading waste	Paper/textiles waste	0.045	0.07
	Wood/straw waste	0.025	0.035
Moderately degrading waste	Other (non-food) organic putrescible/Garden and park waste	0.065	0.17
Rapidly degrading waste	Food waste/sewerage sludge	0.085	0.4

■ Decay rate of waste is given as a constant by types of waste based on the time required to decay.

# 5. Estimation of CH<sub>4</sub> from Waste Disposal Site

## Equation

$$BE_{CH_4, SWDS, y} = \varphi \cdot (1 - f) \cdot GWP_{CH_4} \cdot (1 - OX) \cdot \frac{16}{12} \cdot F \cdot DOC_f \cdot MCF \cdot \sum_{x=1}^y \sum_j W_{j,x} \cdot DOC_j \cdot e^{-k_j \cdot (y-x)} \cdot (1 - e^{-k_j})$$

$BE_{CH_4, SWDS, y}$	Methane emissions during the year y from waste disposal at the solid waste disposal site (SWDS) during the period from the start of waste disposal activity to the end of the year y (tCO <sub>2</sub> e)
$\varphi$	Model correction factor to account for model uncertainties (0.9)
f	Fraction of methane captured at the SWDS and flared, combusted or used in another manner (in this case 0)
$GWP_{CH_4}$	Global Warming Potential (GWP) of methane, valid for commitment (21)
OX	Oxidation factor (reflecting the amount of methane from SWDS that is oxidized in the soil or other material covering the waste (default value: 0.1)
F	Fraction of methane in the SWDS gas (volume fraction) (default value:0.5)
$DOC_f$	Fraction of degradable organic carbon (DOC) that can decompose (default value:0.5)

# 5. Estimation of CH<sub>4</sub> from Waste Disposal Site

## Equation

$$BE_{CH_4, SWDS, y} = \varphi \cdot (1 - f) \cdot GWP_{CH_4} \cdot (1 - OX) \cdot \frac{16}{12} \cdot F \cdot DOC_f \cdot MCF \cdot \sum_{x=1}^y \sum_j W_{j,x} \cdot DOC_j \cdot e^{-k_j \cdot (y-x)} \cdot (1 - e^{-k_j})$$

MCF	Methane correction factor (determined by types of SWDS)
$W_{j,x}$	Amount of organic waste type j disposed at the SWDS in the year x (tons)
$DOC_j$	Fraction of degradable organic carbon (by weight) in the waste type j
$k_j$	Decay rate for the waste type j
j	Waste type category
e	The base of natural logarithm (Napier's number: 2.718)
X	Year during the crediting period: x runs from the first year of the first crediting period (x=1) to the year y for which avoided emissions are calculated (x=y)
Y	Year for which methane emissions are calculated.



## 6. Exercise: Estimation CH<sub>4</sub> emission from SWDS

Question	Estimate the amount of CH <sub>4</sub> emission from SWDS in 1 (one) year under the following preconditions
----------	---

(Preconditions)

Items	Preconditions	
The amount of waste disposed	100 tons/day	
Waste composition by types (% by weight)	Paper/Cardboard	10%
	Textiles	0%
	Food waste	30%
	Wood	0%
	Garden and park waste	20%
	Inert waste	40%
Type of Waste Disposal Landfill	Unmanaged –deep (>5m) landfill	

## 6. Exercise: Estimation CH<sub>4</sub> emission from SWDS

$$BE_{CH_4,SWDS,y} = \underbrace{\varphi \cdot (1 - f) \cdot GWP_{CH_4} \cdot (1 - OX) \cdot \frac{16}{12} \cdot F \cdot DOC_f}_{5.67 \text{ (constant)}} \cdot \underbrace{MCF}_{\text{Choose the factor from below}} \cdot \underbrace{\sum_{x=1}^y \sum_j W_{j,x} \cdot DOC_j \cdot e^{-k_j \cdot (y-x)} \cdot (1 - e^{-k_j})}_{\text{Estimated by yourself}}$$

5.67 (constant)

Choose the factor from below

Type of Waste disposal (Landfill)	Methane Correction Factor (MCF)
Managed - anaerobic	1.0
Managed - semi-aerobic	0.5
Unmanaged - deep (>5 m waste) and/or high water table	0.8
Unmanaged - Shallow (<5 m waste)	0.4
Uncategorised waste disposal	0.6

Estimated by yourself

See next page

## 6. Exercise: Estimation CH<sub>4</sub> emission from SWDS

$$\sum_{x=1}^y \sum_j W_{j,x} \cdot \text{DOC}_j \cdot e^{-k_j \cdot (y-x)} \cdot (1 - e^{-k_j})$$



Total amount of DOCs (Degradable Organic Carbons) decayed in the year



Amount of Waste A

×

DOC content of A

×

Decay rate of DOC A

Amount of Waste B

×

DOC content of B

×

Decay rate of DOC B

Amount of Waste C

×

DOC content of C

×

Decay rate of DOC C

Amount of Waste D

×

DOC content of D

×

Decay rate of DOC D

## 6. Exercise: Estimation CH<sub>4</sub> emission from SWDS

### Step 1: Total amount of waste disposed per year

Amount of waste disposed (tons/day)	Amount of waste disposed (tons/year)
100	36,500

### Step 2: Amount of waste disposed by type of waste

Amount of waste disposed (tons/year)	Waste composition by types (%)		Amount of Waste by types (tons/year)
36,500	Paper/cardboard	10	3,650
	Textiles	0	0
	Food Waste	30	10,950
	Wood	0	0
	Garden/park waste	20	7,300
	Inert waste	40	14,600

## 6. Exercise: Estimation CH<sub>4</sub> emission from SWDS

### Step 3: Total amount of DOCs decayed in a year

Amount of Waste by types (tons/year)		Content of DOC (% on weight basis)	Decay rate in the first year	Total amount of DOCs in a year (tons/year)
Paper/cardboard	3,650	40	0.068	99.28
Textiles	0	24	0.068	0
Food waste	10,950	15	0.330	542.025
Wood	0	43	0.034	0
Garden/park waste	7,300	20	0.156	227.76
Inert waste	14,600	0	0	0
			<b>Total</b>	<b>869.065</b>

## 6. Exercise: Estimation CH<sub>4</sub> emission from SWDS

Step 4: Total emission of CH<sub>4</sub> from SWDS in the first year

$$BE_{CH_4, SWDS, y} = \varphi \cdot (1 - f) \cdot GWP_{CH_4} \cdot (1 - OX) \cdot \frac{16}{12} \cdot F \cdot DOC_f \cdot MCF \cdot \sum_{x=1}^y \sum_j W_{j,x} \cdot DOC_j \cdot e^{-k_j \cdot (y-x)} \cdot (1 - e^{-k_j})$$

5.67 (constant)

×

MCF ( 0.8)

×

Total amount of DOCs decayed  
(869.065)

Answer

3,942Ton CO<sub>2</sub>/year